

B-V8MNEU202206



SMART IN ONE

**V8** **MINI VRF**  
8-18kW



**Midea Building Technologies Division**  
**Midea Group**

Add.: Midea Headquarters Building, 6 Midea Avenue, Shunde, Foshan, Guangdong, China

Postal code: 528311

mbt.midea.com    www.midea-group.com

Note: Product specifications change from time to time as product improvements and developments are released and may vary from those in this document.




DISCOVER  
**RELIABLE COMFORT**





# HYPERLINK


Midea original communication bus chip greatly simplifies installation and saves installation cost.

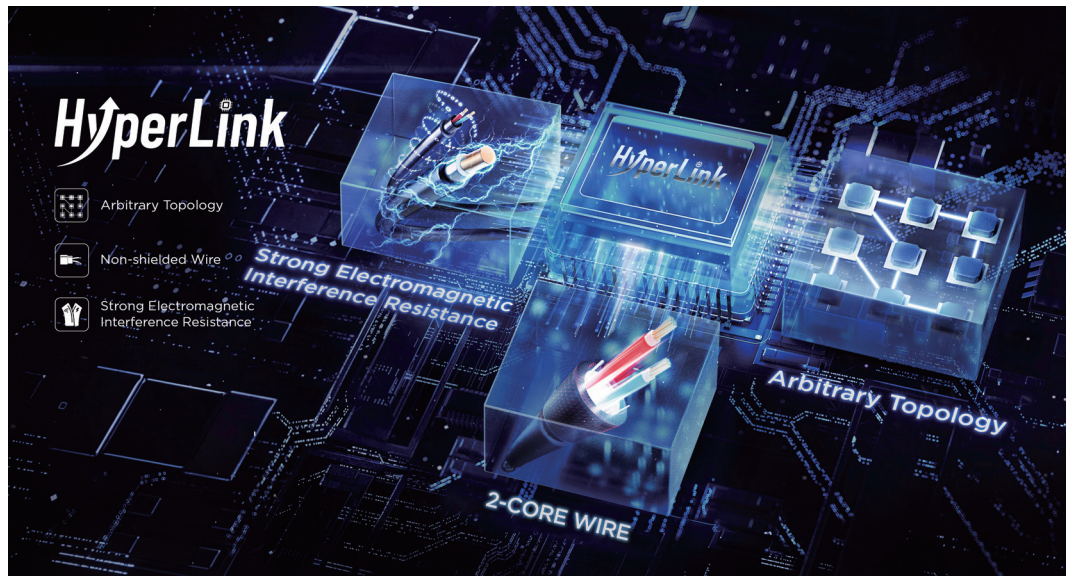

HyperLink communication technology supports any wiring pattern rather than just daisy chain connection, reducing the installation cost and the possibility of incorrect connection. It has stronger anti-interference ability, achieving communication distance up to 2000m.


## Support Any Topology Communication

In addition to the traditional daisy chain connection, the communication wire supports tree connection, star connection, ring connection and so on. The wiring is flexible, which greatly reduces the installation cost and has no possibility of wrong connection on site.

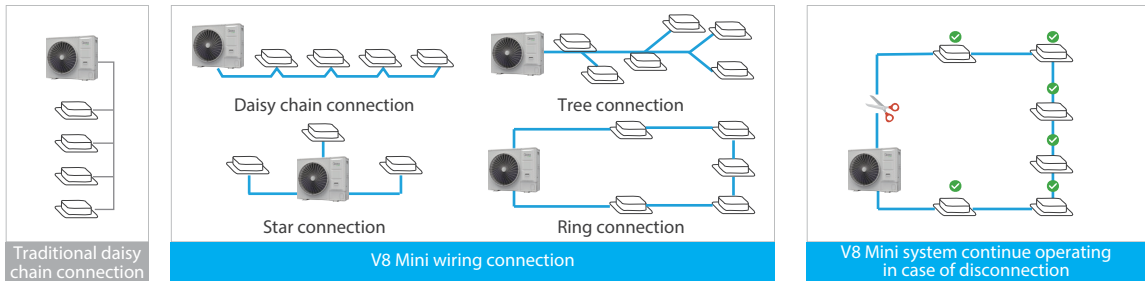

## Super Anti-interference Capability

Special waveform restoration technology enhances anti-interference performance for more stable communication.

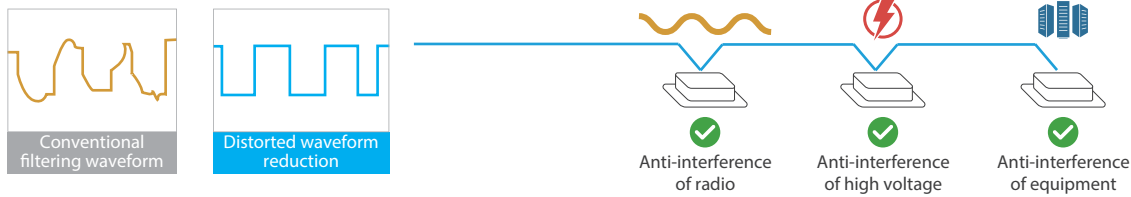

# M-HOLMES


M-Holmes technology reduces installation space constraints and increases the safety of the R32 V8 Mini.



With the optional M-Holmes technology (refrigerant shut-off device, alarm device and refrigerant leak sensor), timely detection, alarm and alert of refrigerant leaks can be achieved, making the entire operating system safer. It is also possible to reduce room size restrictions and adapt to more installation scenarios.

## Refrigerant Shut-off Device

The shut-off device is installed on the outdoor unit side, which can automatically recover the refrigerant to the outdoor unit after the refrigerant leakage and keep the refrigerant safely.

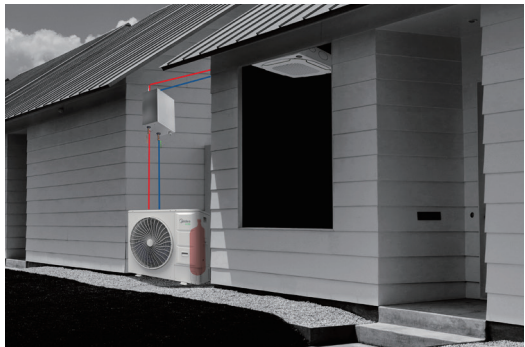

\*The shut-off device must be purchased from Midea

## Refrigerant Leakage Sensor

The refrigerant leak sensor is installed on the indoor unit side to detect refrigerant leaks and can automatically activate alarm measures.



\*The refrigerant leak sensor must be installed at 1.5m above the floor.

## Alarm Device

When a refrigerant leak is detected in the system, the alarm device will alert you in time.



## Cloud-based Remote Alerts

Midea V8 Mini VR transmits system operation data to the cloud in real time through the data cloud gateway, and alerts users in time by SMS or email if there is refrigerant leakage, minimizing hidden dangers.





# META 2.0

META is the abbreviation of Midea Evaporating Temperature Alteration  
Further upgraded META technology to maximize ENERGY SAVING.



**Benefits**


- Energy saving
- Enhanced comfort
- Fast cooling/heating

Built-in professional operation and maintenance algorithm, so that the annual operation energy efficiency of each set of systems increased by more than 28%.

**Variable Refrigerant Flow**

**STEP 1: Architectural space feature recognition**

The indoor unit automatically recognizes the size of the building space and the effectiveness of the insulation according to the rate of temperature drop.

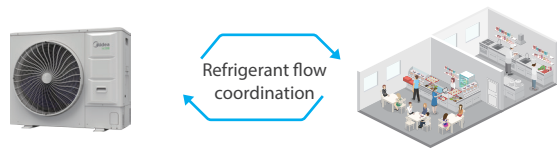


Automatic calculation of the building load and the required refrigerant quantity based on the sensor parameters.

**Variable Refrigerant Temperature**

**STEP 2: System refrigerant temperature determination**

The system automatically matches the evaporating temperature (in cooling) or condensing temperature (in heating) to the room load to maximize comfort and energy efficiency.

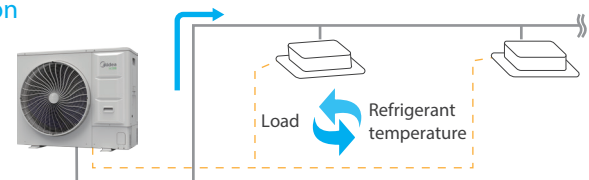


Automatic matching of the corresponding refrigerant temperature to the load.


**Variable Indoor Airflow**

**STEP 3: Adaptive indoor airflow and refrigerant flow**

Each indoor unit automatically adjusts the corresponding indoor airflow and refrigerant flow according to the evaporating/condensing temperature, enabling precise temperature control.



Automatic matching of the corresponding indoor airflow to the load and refrigerant temperature.

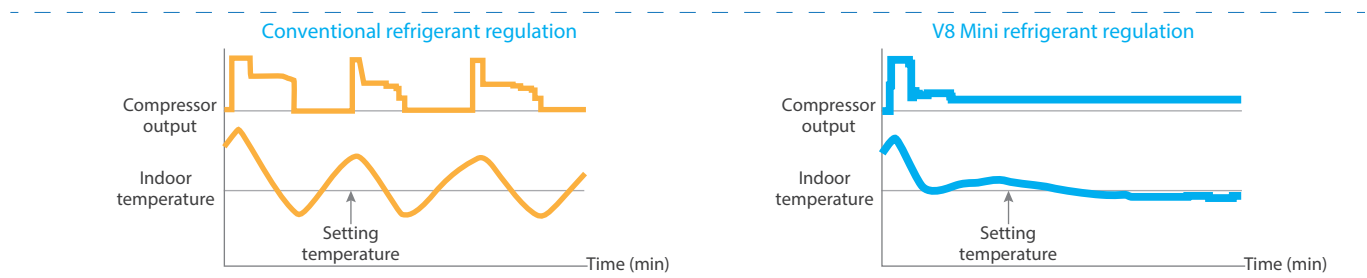

# ZEN AIR 2.0

Further upgraded ZEN AIR technology to maximize COMFORT.





**Benefits**

- Quiet
- Enhanced comfort
- Healthy

0.5°C temperature adjustment, 7 fan speeds selection, sleep mode, silent mode, windless technology, high efficiency filter, a variety of sterilization device and other advanced technologies used in V8 Mini Series VRF are dedicated to creating a quiet, comfortable and healthy indoor environment.


**360° Airflow**

New design, round air flow path ensures uniform air flow and temperature distribution.




**7 Fan Speeds**

7 indoor fan speed options to meet the needs of different indoor conditions.




**Individual Louver Control**

The Individual louver control can control the motors separately, making it possible to control all four louvers independently.

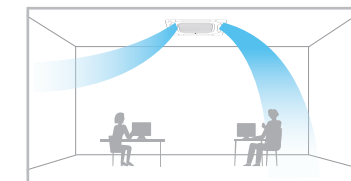



**Sleep Mode**

The smart sleep mode provides a comfortable sleep period and a refreshing wake up time.




**Long Distance Air Delivery**

The Four-way Cassette has an additional 50Pa static pressure for long airflow delivery and is capable of being used in spaces up to 4.5m in floor height.

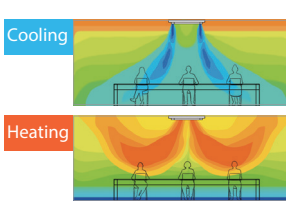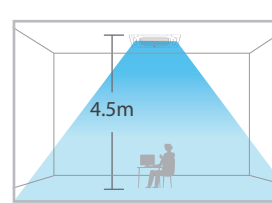

**Heat Exchanger Self-cleaning**

Wash the dirt on the heat exchanger through freezing frost, and then high temperature sterilization.

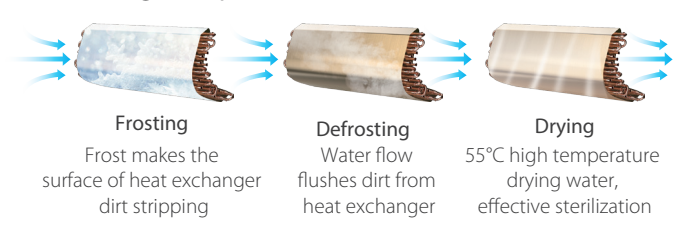



# DOCTOR M 2.0

Further upgraded DOCTOR M technology to maximize EASY SERVICE.



### Benefits

- Easy maintenance
- Fast maintenance
- Low maintenance cost

As many as 13 sensors are distributed throughout the refrigerant system, the state of each part of the refrigerant pipeline can be known in the whole process, which can realize the real-time detection of the system state, predict system faults in advance and provide data analysis for system maintenance. Intelligent Bluetooth module and special Bluetooth after-sales kit can further simplify maintenance and improve maintenance efficiency.

### Intelligent Maintenance Tool

With intelligent Bluetooth module or special Bluetooth after-sales kit, the data of the outdoor unit can be directly read and written on your smart phone without the needs of connecting PC or opening cabinet.



### Real-time Monitoring of Operating Parameters

The V8 Mini Series VRF synchronizes and stores all the unit parameters to the cloud through the data cloud gateway, including the running status, locking status, dirty blocking rate, all spot inspection parameters and so on. Users can query real-time and historical parameters on computers, tablets and mobile phones at any time.



### Cloud-based Big Data Analytics

Midea V8 Mini VR transmits the system operation data to the cloud in real time through the data cloud gateway, and timely reminds the system of abnormal conditions through big data analysis, helping users to proactively avoid the risk of failure that has not yet occurred and minimize hidden problems.



# FELXIBLE INSTALLTION

V8 Mini is highly space saving, slim and compact designed outdoor units, the total pipe length reaches 300m, these ensure FLEXIBLE INSTALLTION.



### Benefits

- Space saving
- Flexible installation
- High ESP

V8 Mini has 6 models from 8kW to 18 kW with compact size which is perfect for commercial and residential applications: small offices, villas, apartments, etc. 35Pa static pressure is standard, which facilitates installation of the unit on balconies with ducting.


### Easy Transportation

V8 Mini can be transported by elevator which makes installation dramatically easy, and effectively reduces time and labor thanks to the small size.



### Long Piping Capability

The total pipe length reaches 300m, the V8 Mini series offers unparalleled flexibility for installation.

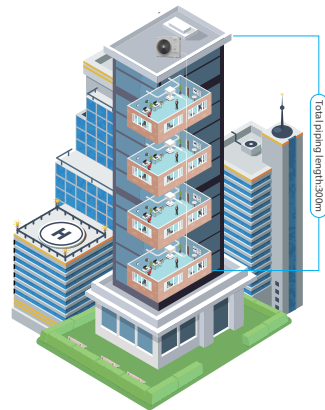


### High External Static Pressure

The 35 Pa static pressure increases flexibility in the choice of the unit's installation point. Strong heat dissipation can be maintained even when the outdoor unit is covered.



### Four-way Piping Connection

A four-direction space is available for connecting pipes and wiring in various installation sites.

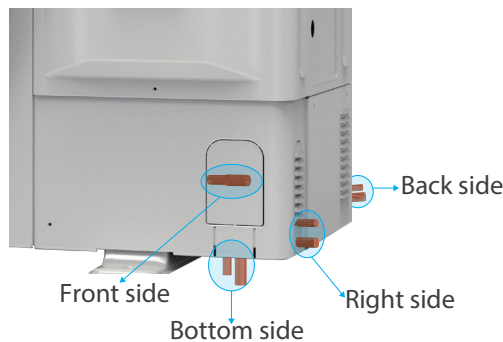




# FREE CONTROL


Intelligent control brings a new experience.



PC

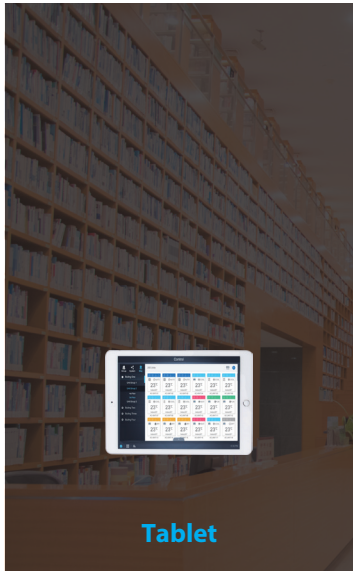

Tablet

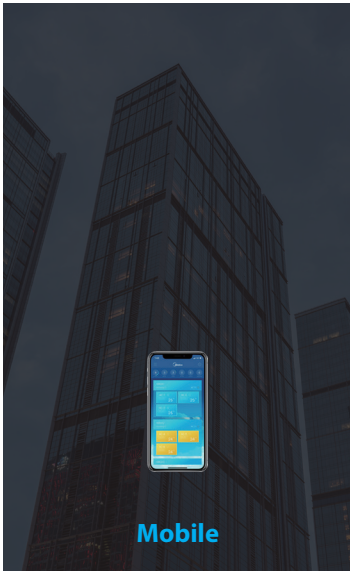

Mobile

### Benefits



Individual control




Central control



Cloud control

V8 Mini Series VRF can provide different control solutions for different application scenarios. From small homes and convenience stores to large shopping malls and complex buildings, V8 Mini Series VRF can provide the most appropriate control solutions to achieve centralized and customized management.

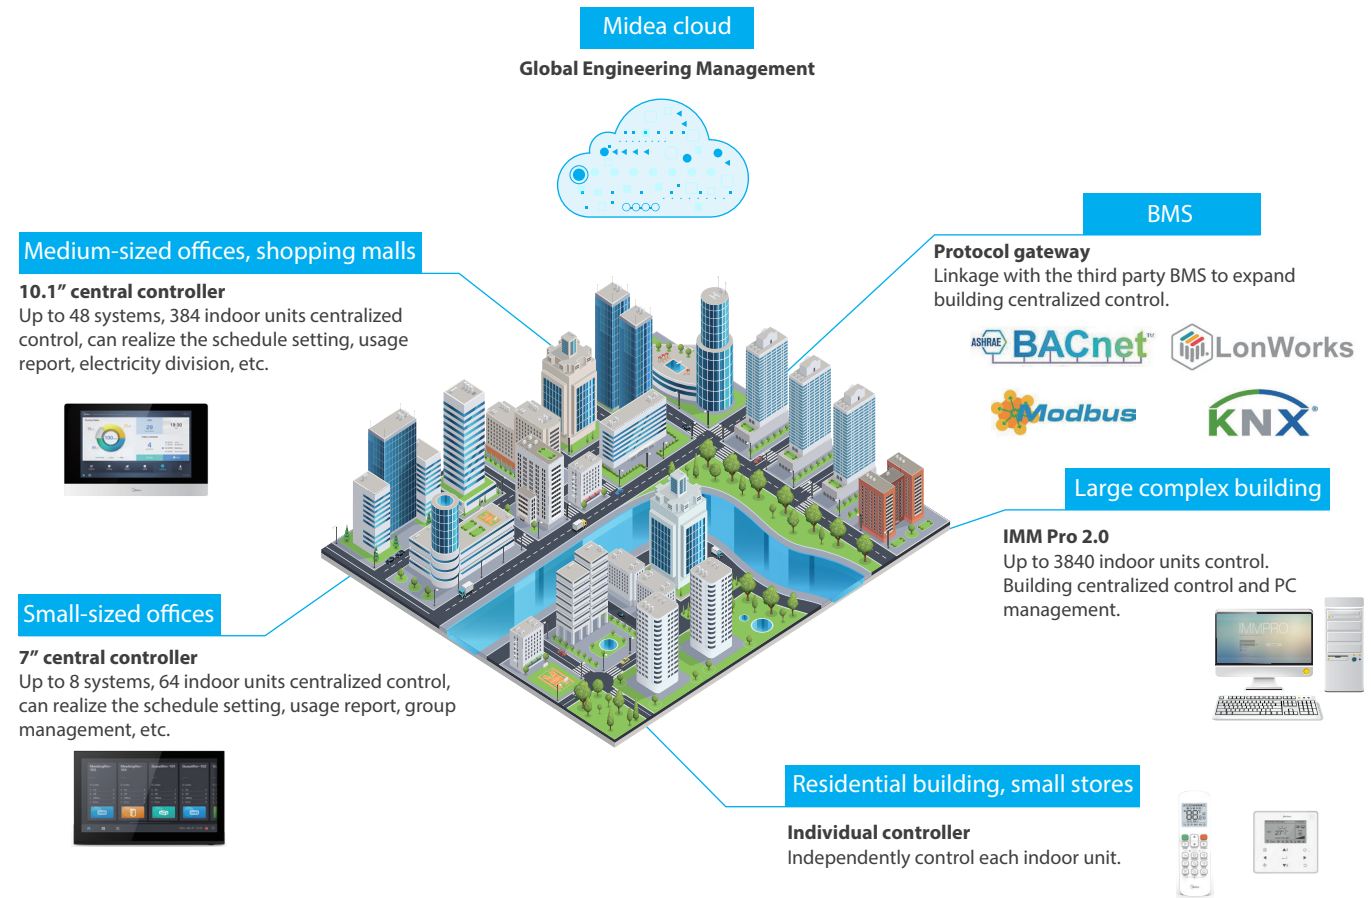

# R-32 REFRIGERANT

R-32 is a kind of refrigerant that does not destroy the ozone layer and does not produce carb, which is more friendly to the environment.



## V8 MINI UNIT LINEUP

### Outdoor Unit

kW	8-18	kW	12-18
220-240V~ 50Hz		380-415V 3N~ 50Hz	

Note: V8 Mini VRF outdoor unit will be available by the end of July 2022.

### Indoor Unit

Type	One-way Cassette	Two-way Cassette	Compact Four-way Cassette
Indoor Unit	 1.8-7.1kW, 7 models	 2.2-7.1kW, 6 models	 1.5-6.3kW, 7 models
Type	Four-way Cassette	Arc Duct	Medium Static Pressure Duct
Indoor Unit	 2.8-16kW, 11 models	 1.5-11.2kW, 10 models	 1.5-16kW, 12 models
Type	High Static Pressure Duct	Wall Mounted	Ceiling & Floor
Indoor Unit	 7.1-16kW, 6 models	 1.5-9kW, 9 models	 3.6-14kW, 8 models
Type	Fresh Air Processing Unit		
Indoor Unit	 11.2-14kW, 3 models		

Note: The different series of indoor units are available in stages.

Pictures are for reference only, please refer to the actual product.

R32 V8 Mini can only available with V8 indoor units. The indoor unit must be installed at a height of 1.8m or more.



# Specification

220-240V 1N~ 50Hz

HP			3.0	3.6	4.5	5.0	6.0	6.5
Model			MV8M-80WV2N8	MV8M-100WV2N8	MV8M-120WV2N8	MV8M-140WV2N8	MV8M-160WV2N8	MV8M-180WV2N8
Power supply		V/Ph/Hz	220-240V 1N~ 50Hz					
Cooling <sup>1</sup>	Capacity	kW	7.2	9.0	12.3	14.0	15.5	17.5
		kBtu/h	24	30	41	47	52	59
	Power input	kW	2.00	2.79	3.73	4.79	5.44	6.46
	EER		3.60	3.23	3.30	2.92	2.85	2.71
	SEER		5.60	5.60	7.80	7.35	7.35	7.10
Heating (Rated) <sup>2</sup>	Capacity	kW	7.2	9.0	12.3	14.0	15.5	17.5
		kBtu/h	24	30	41	47	52	59
	Power input	kW	1.80	2.33	2.89	3.37	3.77	4.49
	COP		4.00	3.87	4.26	4.15	4.11	3.90
	SCOP		3.80	3.80	4.90	4.80	4.67	4.80
Heating (Max)	Capacity	kW	9.0	10.8	14.0	16.0	17.5	19.5
		kBtu/h	30	36	47	54	59	66
	Power input	kW	2.50	3.18	3.59	4.21	4.73	5.57
	COP		3.60	3.40	3.90	3.80	3.70	3.50
Connected indoor unit	Total capacity		50%~160%	50%~160%	50%~160%	50%~160%	50%~160%	50%~160%
	Maximum quantity		5	6	8	10	11	12
Compressor	Type		DC inverter	DC inverter	DC inverter	DC inverter	DC inverter	DC inverter
	Quantity		1	1	1	1	1	1
	Oil type		FW68S	FW68S	FW68S	FW68S	FW68S	FW68S
	Start-up method		Soft start	Soft start	Soft start	Soft start	Soft start	Soft start
Fan	Type		Propeller	Propeller	Propeller	Propeller	Propeller	Propeller
	Motor type		DC	DC	DC	DC	DC	DC
	Quantity		1	1	1	1	1	1
	Motor output	kW	0.2	0.2	0.2	0.2	0.2	0.2
	Airflow rate	m³/h	5200	5200	5000	5000	5000	5500
	Drive type		Direct	Direct	Direct	Direct	Direct	Direct
Refrigerant	Type		R32					
	Factory charge	kg	2	2	2.85	2.85	2.85	2.85
Pipe connections <sup>3</sup>	Liquid pipe	mm	15.9	15.9	15.9	15.9	15.9	19.1
	Gas pipe	mm	9.5	9.5	9.5	9.5	9.5	9.5
Sound pressure level <sup>4</sup>		dB(A)	53	53	55	56	56	58
Net dimensions (WxHxD)		mm	1040x865x410	1040x865x410	1040x865x410	1040x865x410	1040x865x410	1040x865x410
Packed dimensions (WxHxD)		mm	1120x980x560	1120x980x560	1120x980x560	1120x980x560	1120x980x560	1120x980x560
Net weight		kg	78	78	94	94	94	94
Gross weight		kg	85	85	102	102	102	102
Ambient temp. operation range	Cooling (DB)	°C	-15~52					
	Heating (DB)	°C	-20~30					

- Notes:**  
1.Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 5m with zero level difference;connect to Duct type indoor unit.  
2.Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 5m with zero level difference;connect to Duct type indoor unit.  
3. Diameters given are those for the pipe connecting the outdoor unit combination to the first indoor branch joint for systems with total equivalent liquid piping lengths of less than 90m. For systems with total equivalent liquid piping lengths of 90m or longer, please refer to the Engineering Data Book for connection piping diameters.  
4. Sound pressure level is measured at a position 1m in front of the unit and 1.3m above the floor in a semi-anechoic chamber.

# Specification

380-415V 3N~ 50Hz

HP			4.5	5.0	6.0	6.5
Model name			MV8M-120WV2RN8	MV8M-140WV2RN8	MV8M-160WV2RN8	MV8M-180WV2RN8
Power supply		V/Ph/Hz	380-415V 3N~ 50Hz			
Cooling <sup>1</sup>	Capacity	kW	12.3	14.0	15.5	17.5
		kBtu/h	41	47	52	59
	Power input	kW	3.73	4.79	5.44	6.46
	EER		3.30	2.92	2.85	2.71
	SEER		7.80	7.35	7.35	7.10
Heating(Rated) <sup>2</sup>	Capacity	kW	12.3	14.0	15.5	17.5
		kBtu/h	41	47	52	59
	Power input	kW	2.89	3.37	3.77	4.49
	COP		4.26	4.15	4.11	3.90
	SCOP		4.90	4.80	4.67	4.80
Heating (Max)	Capacity	kW	14.0	16.0	17.5	19.5
		kBtu/h	47	54	59	66
	Power input	kW	3.59	4.21	4.73	5.57
	COP		3.90	3.80	3.70	3.50
Connected indoor unit	Total capacity		50%~160%	50%~160%	50%~160%	50%~160%
	Maximum quantity		8	10	11	12
Compressor	Type		DC inverter	DC inverter	DC inverter	DC inverter
	Quantity		1	1	1	1
	Oil type		FW68S	FW68S	FW68S	FW68S
	Start-up method		Soft start	Soft start	Soft start	Soft start
Fan	Type		Propeller	Propeller	Propeller	Propeller
	Motor type		DC	DC	DC	DC
	Quantity		1	1	1	1
	Motor output	kW	0.2	0.2	0.2	0.2
	Airflow rate	m³/h	5000	5000	5000	5500
	Drive type		Direct	Direct	Direct	Direct
Refrigerant	Type		R32			
	Factory charge	kg	2.85	2.85	2.85	2.85
Pipe connections <sup>3</sup>	Liquid pipe	mm	15.9	15.9	15.9	19.1
	Gas pipe	mm	9.5	9.5	9.5	9.5
Sound pressure level <sup>4</sup>		dB(A)	55	56	56	58
Net dimensions (WxHxD)		mm	1040x865x410	1040x865x410	1040x865x410	1040x865x410
Packed dimensions (WxHxD)		mm	1120x980x560	1120x980x560	1120x980x560	1120x980x560
Net weight		kg	110	110	110	110
Gross weight		kg	118	118	118	118
Ambient temp. operation	Cooling(DB)	°C	-15~52			
	Heating(DB)	°C	-20~30			

- Notes:**  
1.Indoor temperature 27°C DB, 19°C WB; outdoor temperature 35°C DB; equivalent refrigerant piping length 5m with zero level difference;connect to Duct type indoor unit.  
2.Indoor temperature 20°C DB; outdoor temperature 7°C DB, 6°C WB; equivalent refrigerant piping length 5m with zero level difference;connect to Duct type indoor unit.  
3. Diameters given are those for the pipe connecting the outdoor unit combination to the first indoor branch joint for systems with total equivalent liquid piping lengths of less than 90m. For systems with total equivalent liquid piping lengths of 90m or longer, please refer to the Engineering Data Book for connection piping diameters.  
4. Sound pressure level is measured at a position 1m in front of the unit and 1.3m above the floor in a semi-anechoic chamber.