



 Midea



MIDEA HEATING AND COOLING

MULTI SPLIT



OFFICIAL PARTNER

Midea, established in 1968, is a public limited company. Since July 2016, it has been a Fortune 500 company, offering one of the most comprehensive ranges of products in the home appliances industry. Midea specializes in air treatment (both residential and commercial solutions), refrigeration, laundry, cooking appliances, small kitchen appliances, water appliances, floor care, and lighting.

Midea is My True Blue Idea

Our objective is to deliver the best home solutions for every Australia family. Our home solutions are inspired by the ideas and needs of our Australian guests. Therefore, we created the slogan "Midea is My True Blue Idea".

Midea Appliances Australia

Established in 2018 as MD Appliances Pty Ltd, we are dedicated to establishing a successful Midea air conditioning story in Australia by maintaining high standards of performance and customer satisfaction.

more than
\$51.39 Bn
of revenue in
2023

serve
customers in
100+
countries

32
global
production
facilities

160K+
employees
worldwide

Fortune Global
500
company



7 years parts and labor warranty

For Residential Products
Online Registration T&C Apply



5 years parts and labor warranty

For Commercial Products



2 years parts and labor warranty

For Heavy Commercial Products



Local after sales service and support

* Source Euromonitor International (Shanghai) Limited; Consumer Appliances 23ed, retail volume sales in unit, 2022 data


Our Technology:

THE EXCLUSIVE INVERTER QUATTRO™ TECHNOLOGY



A brain that calculates your needs in any conditions

Midea's Genius Core Energy Chip with Precise-control Inverter Deduction Algorithm reduces energy loss by enabling more precise signal reception, accurate data processing, and prompt delivery of instructions to the compressor. As a result, Midea's inverter compressor offers more stable operation than common inverters. Its super-smooth inverter frequency of variation ensures you never notice fluctuations in room temperature.

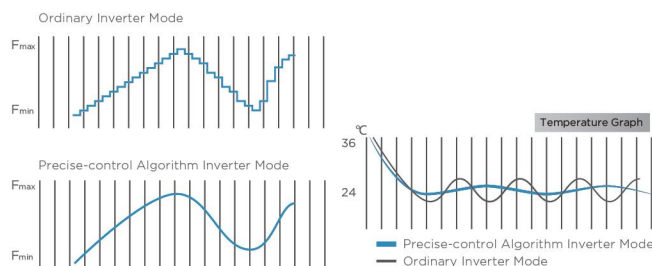

Up to **71%**
Ultra Energy Saving

65Hz in **6** seconds
Flash Cooling/Heating


Within
 $\pm 0.5^{\circ}\text{C}$
Comfort With
Stable Temperature

Superior operation from
60 to -30°C
High Ambient Cooling/Heating

FULL DC INVERTER SYSTEM

Thanks to the Full DC Inverter System, Midea's air conditioners achieved 20% higher **energy efficiency compared to** normal AC inverters.


On top of the Midea's Full DC Inverter System, the Genius Core is an intelligent commander that keeping the harmony internally and externally.



**Sine-wave
DC inverter control**




**Rear-earth
magnet motor**



**IPM DC
Fan Motor**




Vector Shaped Motor




Smooth moving
High Efficiency



Conventional



Hard moving
Low Efficiency

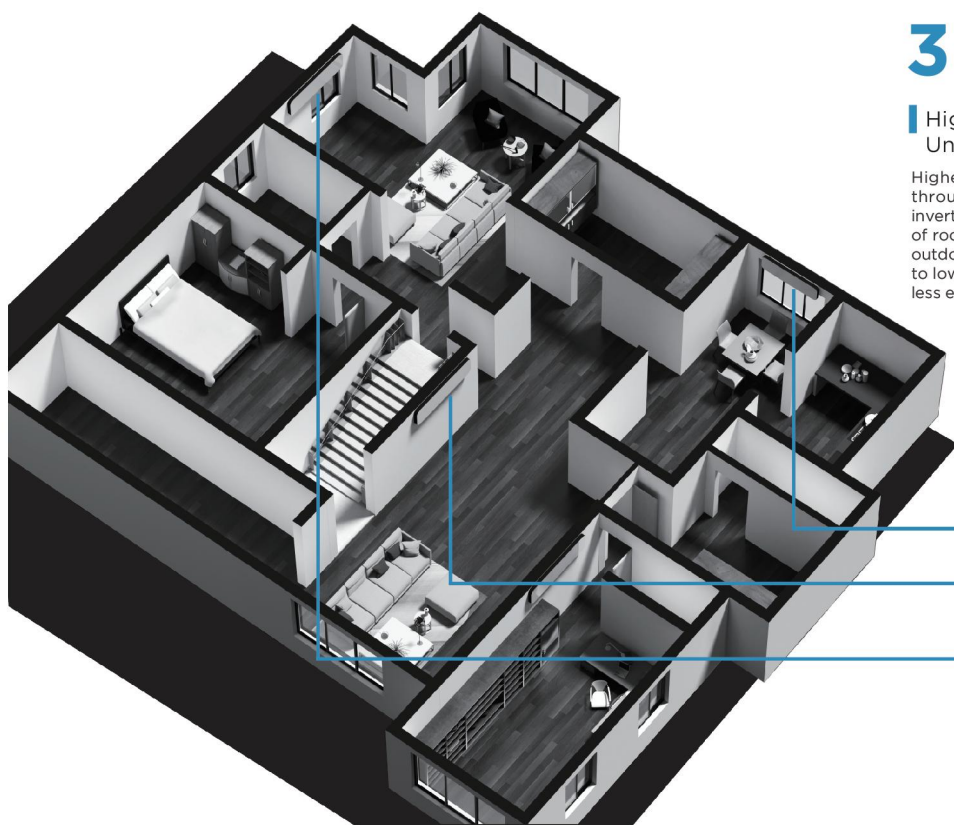

30%

Higher Energy Efficiency Under Partial load

Higher efficiency can be achieved through partial output mode of the inverter compressor. In situations only a part of rooms that need air conditioning, the outdoor unit will run with partial output to lower the power consumption. Up to 30% less energy use under partial load



Bionic Blower Wheel and Improved Air Duct

Based on natural models and bionic principles, Midea's fan blade design can effectively reduce airflow resistance and noise. Together with the optimized air duct, it delivers the same air flow volume with 30% less energy consumption.



Ordinary fan blade design



Midea high static pressure fan blade design



Standard air duct damper




High-efficiency air duct damper



V-PAM (Vector + I-PAM) Inverter Control

V-PAM inverter control reduces the effects of magnetic flux and increases the maximum speed and efficiency of the compressor by vector control technology. With this technology, further miniaturization, higher efficiency, and better performance are attained.

Full DC Inverter Control



Twin-Rotary Compressor

The Twin-Rolling compressor system rotating with 180° symmetrical balance ensures low vibration & noise due to the small torque

MULMI0371B, MULMI0480B,
MULMI0513B, MULMI0618B


Inner Groove-Tube

A densely serrated shape has been applied to the copper to enlarge the heat exchange area. The latest heat exchanger has increased the tooth-count from 45 to 54, further improving the efficiency of heat transfer.




AUTOMATIC WIRING/PIPING CORRECTION

Midea multi-split unit helps the technicians to easily finish the wiring and piping. It saves great efforts by automatically correcting the connection and avoids any trial operations of every indoor unit after installation. The technicians press “check switch”, wait for few minutes and the machine will begin to operate as expected.

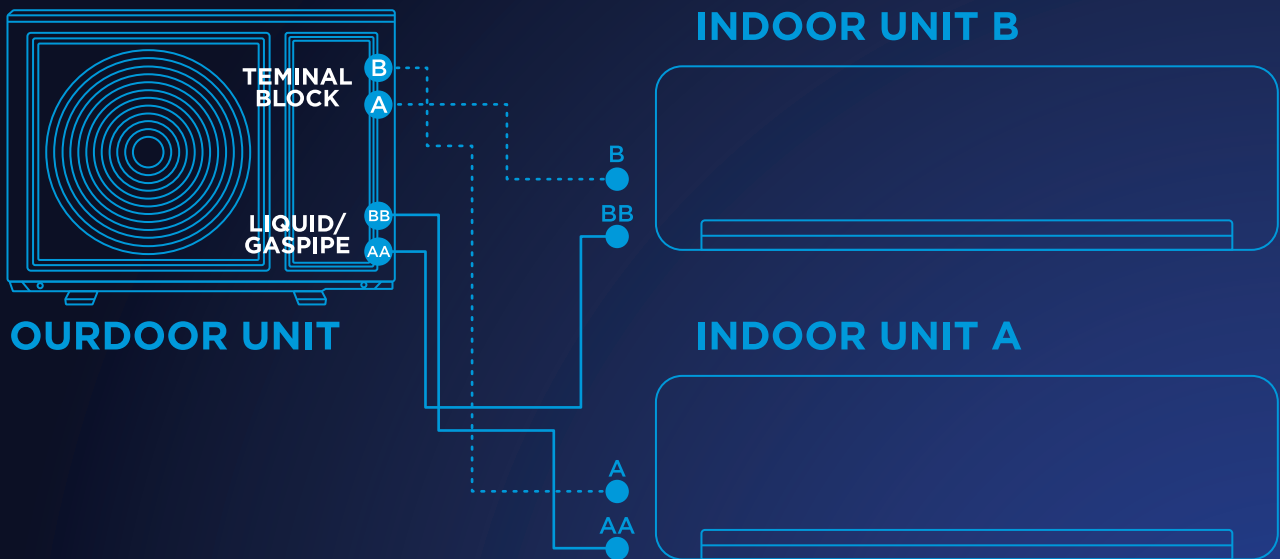


MULTI-SPLIT UNIT - THE RIGHT AIR SOLUTION FOR MULTIPLE SPACE

BEFORE

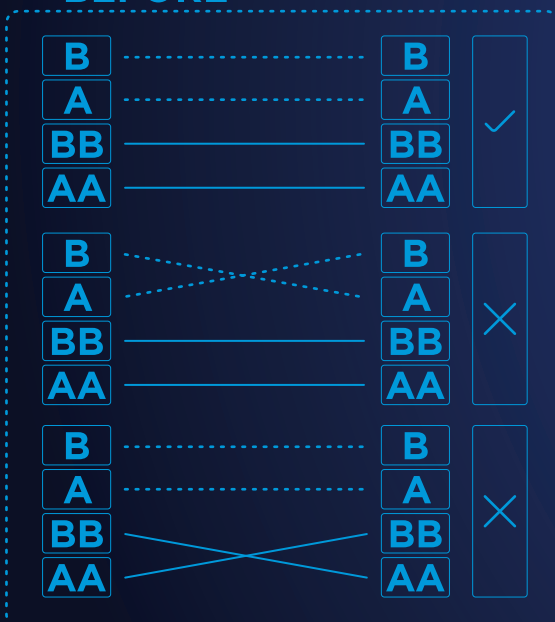

NOW

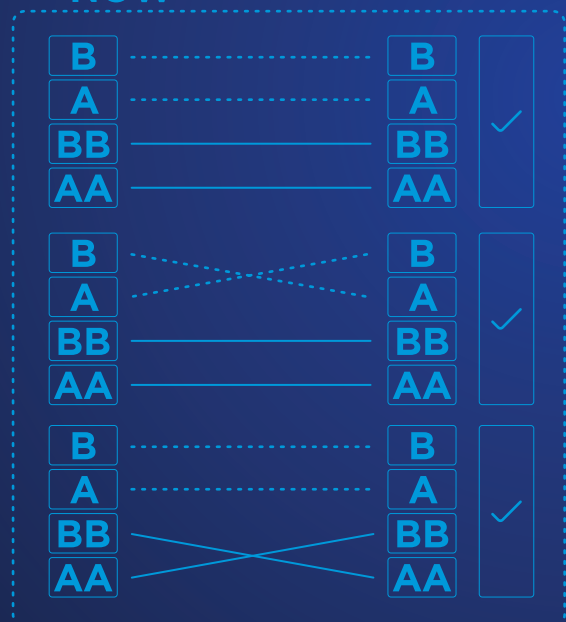

MULTI ODU



Multi ODU	Cooling Capacity (kW)	Heating Capacity (kW)	Max. IDU amounts
MULMI0250B	5.25 (0.9 - 5.7)	5.5 (1.9 - 5.7)	Up to 2 units
MULMI0371B	7.05 (1.71 - 9.01)	7.3 (1.78 - 9.41)	Up to 3 units
MULMI0408B	9.85 (1.71 - 12.13)	9.9 (1.78 - 12.78)	Up to 4 units
MULMI0511B	10.5 (2.63 - 11.72)	11.0 (2.63 - 12.30)	Up to 5 units
MULMI0513B	13.5 (1.71 - 16.75)	14.8 (1.78 - 18.15)	Up to 5 units
MULMI0618B	18.0 (4.57 - 18.5)	20.5 (4.98-20.7)	Up to 6 units

WIRELESS CONTROLLER

WIRELESS CONTROLLER FEATURE LIST



* Comes in the box for all split systems.

* Optional for all cassettes and ducted systems.
(To use a wireless controller, a ducted system will require a wired controller as a signal receiver.)

Temperature range	16-30°C 62-86°F
Backlight	√
Press Button	√
ON/OFF	√
Mode	√
Temp Adjustment	√
Fanspeed	√
Turbo	√
Follow Me	√
Timer ON/OFF	√
Child Lock	√
Dry	√
Setting Temp Limit	√

MULTI SPLIT OUTDOOR



Model Number			MULMI0250B	MULMI0371B	MULMI0480B
Power supply		Ph-V-Hz	220-240-1-50	220-240-1-50	220-240-1-50
Cooling	Capacity (indoor+Outdoor)*	kW	5.25	7.1	8.0
	Power Input (indoor+Outdoor)	kW	1.3	1.95	2.0
	Rated current (Indoor+Outdoor)	A	6.81	8.68	9.15
	AEER (Indoor+Outdoor)*	W/W	3.94	3.57	3.89
	TCSPF (HOT/MIX/COLD)		6.514/5.609/5.737	5.977/5.169/5.302	6.891/5.582/5.683
Heating	Capacity (Indoor+Outdoor)*	kW	5.5	7.5	8.5
	Power input (indoor+Outdoor)*	kW	1.16	1.64	1.93
	Rated current (indoor+Outdoor)*	A	6.65	7.51	8.83
	ACOP (Indoor+Outdoor)	W/W	4.62	4.0	4.0
	HPSF (HOT/MIX/COLD)		5.094/4.658/4.022	5.086/4.712/4.333	5.216/4.646/4.09
Max.current		A	12	17.5	19.0
Outdoor unit	Dimension(H*W*D)	mm	554×805×330	673×890×342	810×946×410
	Packing(H*W*D)	mm	615×915×370	750×1030×438	875×1090×500
	Net/Gross weight	Kg	34.6/37.7	48.1/51.6	66.2/71.6
Refrigerant	Type		R32	R32	R32
	Pre-charged length for all indoor to outdoor	m	15	22.5	30
Refrigerant piping	Liquid side		2 × Ø6.35(1/4")	3 × Ø6.35(1/4")	4 × Ø6.35(1/4")
	Gas side		2 × Ø9.52(3/8")	3 × Ø9.52(3/8")	3 × Ø9.52(3/8") + 1 × Ø12.7(1/2")
	Max. length for all rooms	m	40	60	80
	Max.length for one indoor unit	m	25	30	35
	Min. length for one indoor unit	m	6	9	12
	Max. height difference(m)	OU to IU	15	15	15
		IU to IU	10	10	10

Model Number			MULMI0511B	MULMI0513B	MULMI0618B
Power supply		Ph-V-Hz	220-240-1-50	220-240-1-50	220-240-1-50
Cooling	Capacity (indoor+Outdoor)*	kW	10.5	13.5	18.0
	Power Input (indoor+Outdoor)	kW	3.20	3.73	5.1
	Rated current (Indoor+Outdoor)	A	14.65	17.8	22.8
	AEER (Indoor+Outdoor)*	W/W	3.22	3.56	3.48
	TCSPF (HOT/MIX/COLD)		5.355/4.598/4.749	5.959/5.304/5.53	5.711/5.159/5.397
Heating	Capacity (Indoor+Outdoor)*	kW	11.0	14.0	20.5
	Power input (indoor+Outdoor)*	kW	2.75	3.15	5.0
	Rated current (indoor+Outdoor)*	A	12.59	16.2	24.0
	ACOP (Indoor+Outdoor)	W/W	4.0	4.35	4.0
	HPSF (HOT/MIX/COLD)		4.579/4.136/3.669	5.545/4.8/4.312	5.07/4.372/3.742
Max.current		A	22.0	30	33
Outdoor unit	Dimension(H*W*D)	mm	810×946×410	975×980×415	952×415×1333
	Packing(H*W*D)	mm	875×1090×500	1080×1145×500	1095×495×1480
	Net/Gross weight	Kg	75.9	91/106.4	110.6/124.9
Refrigerant	Type		R32	R32	R32
	Pre-charged length for all indoor to outdoor	m	37.5	37.5	45
Refrigerant piping	Liquid side		5 × Ø6.35(5x1/4")	5 × Ø6.35(5x1/4")	6 × Ø6.35(1/4")
	Gas side		4 × Ø9.52(3/8") + 1 × Ø12.7(1/2")	3 × Ø9.52 + 2 × Ø12.7(3x3/8" + 2 × 1/2")	4 × Ø9.52(3/8") + 2 × Ø12.7(1/2")
	Max. length for all rooms	m	80	80	80
	Max.length for one indoor unit	m	35	35	35
	Min. length for one indoor unit	m	15	15	15
	Max. height difference(m)	OU to IU	15	15	15
		IU to IU	10	10	10

MULTI SPLIT HIGH WALLS




Venus

Model Number			MFAG20VA-N	MFAG26VA-N	MFAG36VA-N	MFAG51VA-N
Power supply		Ph-V-Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz
Rated Cooling	Capacity	kW	2.00	2.60	3.55	5.00
Rated Heating	Capacity	kw	2.25	2.70	4.00	5.20
Indoor air flow(Turbo/Hi/Mi/Lo/Silence)		m3/h	550/460/340/270	550/460/340/270	660/530/380/310	950/800/600/500
Indoor noise evel/ (Turbo/Hi/Mi/Lo/Silence)(sound pressure)		dB(A)	43.0/38/31.5/30/25	46.4/39/32.5/30/24.5	46.7/39/32.5/30/24.5	471/44.5/38/34.5/28
Indoor noise level(sound power)		dB(A)	53	55	56	57
Indoor unit	Dimenson(H*W*D)	mm	292×729×200	292×729×200	295×802×200	321×971×228
	Packing(H*W*D)	mm	375×790×270	375×790×270	380×875×285	405×1045×305
	Net/Gross weight	Kg	8.0/10.3	8.0/10.3	8.5/11.1	11./14.4
Refrigerant piping	Liquid side/ Gas side	mm(inch)	6.35mm(1/4in) /9.52mm(3/8in)	6.35mm(1/4in) /9.52mm(3/8in)	6.35mm(1/4in) /9.52mm(3/8in)	6.35mm(1/4in) /12.7mm(1/2in)

Model Number			MFAG60VA-N	MFAG70VA-N	MFAG80VA-N
Power supply		Ph-V-Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz	220-240V1Ph,50Hz
Rated Cooling	Capacity	kW	6.00	7.00	8.00
Rated Heating	Capacity	kw	6.20	7.50	8.50
Indoor air flow(Turbo/Hi/Mi/Lo/Silence)		m3/h	950/800/600/500	1375/1205/844/670	1375/1205/844/670
Indoor noise evel/ (Turbo/Hi/Mi/Lo/Silence)(sound pressure)		dB(A)	471/44.5/38/34.5/28	576/45/39/33.5/29.5	576/45/39/33.5/29.5
Indoor noise level(sound power)		dB(A)	59	63	64
Indoor unit	Dimenson(H*W*D)	mm	321×971×228	337×1082×234	337×1082×234
	Packing(H*W*D)	mm	405×1045×305	315×1155×415	315×1155×415
	Net/Gross weight	Kg	11./14.4	13.5/17.1	13.5/17.1
Refrigerant piping	Liquid side/ Gas side	mm(inch)	6.35mm(1/4in) /12.7mm(1/2in)	6.35mm(1/4in) /15.9mm(5/8in)	6.35mm(1/4in) /15.9mm(5/8in)

DUCTED CONNECTED



MULMID09B
MULMID12B
MULMID18B
MULMID24B

Model Number			MULMID09B	MULMID12B
Cooling	Capacity	kW	2.6	3.5
Heating	Capacity	kW	2.9	3.8
Indoor air flow		m ³ /h	500/340/230	600/480/300
External Static	Rated	Pa	25	25
Pressure	Range	Pa	0-40	0-60
Indoor noise level (Hi/Mi/Lo)		dB(A)	40/34.5/27.5	34.5/32/30
Indoor unit	Dimension (H*W*D)	mm	200x700x450	200x700x506
	Packing (H*W*D)	mm	275x860x540	285x860x540
	Net / Gross weight	Kg	18/22	17.8/21.5
Design pressure		MPa	4.3/1.7	4.3/1.7
Drainage water pipe diameter		mm	OD Ø25	OD Ø25
Refrigerant piping	Liquid side / Gas side	mm	Ø6.35 / Ø9.52(1/4"/3/8")	Ø6.35 / Ø9.52(1/4"/3/8")
Standard Thermostat type			Remote control	Remote control

Model Number			MULMID18B	MULMID24B
Cooling	Capacity	kW	5	7
Heating	Capacity	kW	5.5	7.6
Indoor air flow		m ³ /h	911/706.3/515.2	1229/1035/825
External Static	Rated	Pa	25	25
Pressure	Range	Pa	0-100	0-160
Indoor noise level (Hi/Mi/Lo)		dB(A)	42/39/35	49/46/41
Indoor unit	Dimension (H*W*D)	mm	210x880x674	249x1100x774
	Packing (H*W*D)	mm	280x1070x725	315x1305x805
	Net / Gross weight	Kg	24.4/29.6	32.3/39.1
Design pressure		MPa	4.3/1.7	4.3/1.7
Drainage water pipe diameter		mm	OD Ø25	OD Ø25
Refrigerant piping	Liquid side / Gas side	mm	Ø6.35 / Ø12.7(1/4"/1/2")	Ø9.52 / Ø15.9(3/8"/5/8")
Standard Thermostat type			Remote control	Remote control

COMPACT CASSETTE



MULMIC07B
MULMIC09B
MULMIC12B
MULMIC18B

Model Number			MULMIC07B	MULMIC09B
Cooling	Capacity	kW	2.0	2.6
Heating	Capacity	kW	2.35	2.93
Indoor air flow		m ³ /h	580/500/450	580/500/450
Indoor noise level (Hi/Mi/Lo)		dB(A)	38/33/29	38/33/29
Indoor unit	Dimension (H*W*D)	mm	260x570x570	260x570x570
	Packing (H*W*D)	mm	317x662x662	317x662x662
	Net / Gross weight	Kg	14.5/17.3	14.5/17.3
Design pressure		MPa	4.6/1.7	4.6/1.7
Drainage water pipe diameter		mm	OD Ø25	OD Ø25
Refrigerant piping	Liquid side / Gas side	mm	Ø6.35 / Ø9.52(1/4"/3/8")	Ø6.35 / Ø9.52(1/4"/3/8")
Standard Thermostat type			Remote control	Remote control

Model Number			MULMIC12B	MULMIC18B
Cooling	Capacity	kW	3.5	5.0
Heating	Capacity	kW	4.1	5.42
Indoor air flow		m ³ /h	617/504/415	680/560/500
Indoor noise level (Hi/Mi/Lo)		dB(A)	41/37/34	44/42/41
Indoor unit	Dimension (H*W*D)	mm	260x570x570	260x570x570
	Packing (H*W*D)	mm	317x662x662	317x662x662
	Net / Gross weight	Kg	16.2/21.4	16.2/21.4
Design pressure		MPa	4.2/1.5	4.3/1.7
Drainage water pipe diameter		mm	OD Ø25	OD Ø25
Refrigerant piping	Liquid side / Gas side	mm	Ø6.35 / Ø9.52(1/4"/3/8")	Ø6.35 / Ø12.7(1/4"/1/2")
Standard Thermostat type			Remote control	Remote control

ONE WAY CASSETTE



MULMIO09
MULMIO12
MULMIO18

Model Number			MULMIO09	MULMIO12	MULMIO18
Power supply		Ph-V-Hz	220-240V-1Ph-50Hz	220-240V-1Ph-50Hz	220-240V-1Ph-50Hz
Rated Cooling	Capacity	kW	2.76	3.60	5.00
Rated Heating	Capacity	kW	2.90	3.90	5.20
Indoor air flow (Turbo/Hi/Mi/Lo/Silence)		m³/h	188/166/141/97	188/166/141/97	188/166/141/97
Indoor noise level / (Turbo/Hi/Mi/Lo/Silence) (sound pressure)		dB(A)	43/40/36/27	43/40/36/27	43/40/36/27
Outdoor sound pressure level		dB(A)	60	60	60
Indoor unit	Dimension (H*W*D)	mm	228x1278x335	228 x 1278x335	228 x 1278x335
	Packing (H*W*D)	mm	575x1463x571	575 x 1463x571	575 x 1463x571
	Net / Gross weight	Kg	20.1/35.8	20.1/35.8	20.1/35.8
Refrigerant piping	Liquid side / Gas side	mm(inch)	6.35mm(1/4") / 12.7mm(1/2")	6.35mm(1/4") / 12.7mm(1/2")	6.35mm(1/4") / 12.7mm(1/2")

INDOOR UNITS COMBINATION

INDOOR UNITS COMBINATION MULMI0250B

One Unit (kW)	Two Unit (kW)	
3.5	2.0+2.0	2.6+2.6
5.3	2.0+2.6	2.6+3.5
/	2.0+3.5	3.5+3.5

INDOOR UNITS COMBINATION MULMI0371B

One Unit (kW)	Two Unit (kW)			Two Unit (kW)		
5.3	2.0+2.0	2.6+2.6	3.5+5.3	2.0+2.0+2.0	2.0+2.6+2.6	2.0+2.0+5.3
6.0	2.0+2.6	2.6+3.5	2.0+5.3	2.0+2.0+2.6	2.0+2.6+3.5	2.0+2.6+5.3
/	2.0+3.5	2.6+5.3	3.5+6.0	2.0+2.0+3.5	2.6+2.6+3.5	2.0+2.0+6.0
/	2.0+5.3	3.5+3.5	2.0+6.0	2.0+2.0+5.3	2.0+3.5+3.5	2.0+2.6+6.0
/	2.0+6.0	2.6+6.0	/	2.0+2.0+6.0	/	/

INDOOR UNITS COMBINATION MULMI0480B

One Unit (kW)	Two Unit (kW)				Three Unit (kW)				
7.1	2.0+2.0	2.6+2.6	3.5+5.3	2.0+7.1	2.0+2.0+2.0	2.0+2.6+2.6	2.0+3.5+5.3	2.6+3.5+5.3	2.6+3.5+5.3
8.0	2.0+2.6	2.6+3.5	3.5+7.1	2.0+8.0	2.0+2.0+2.6	2.0+2.6+3.5	2.6+2.6+2.6	3.5+3.5+3.5	3.5+3.5+5.3
/	2.0+3.5	2.6+5.3	5.3+5.3	3.5+8.0	2.0+2.0+3.5	2.0+2.6+5.3	2.6+2.6+3.5	2.6+3.5+3.5	2.6+3.5+7.1
/	2.0+5.3	3.5+3.5	2.6+7.1	6.0+6.0	2.0+2.0+5.3	2.0+3.5+3.5	2.6+2.6+5.3	2.0+2.0+7.1	3.5+3.5+7.1
/	2.0+6.0	2.6+6.0	3.5+6.0	2.6+8.0	2.0+2.0+6.0	2.0+2.6+6.0	2.0+3.5+6.0	2.6+3.5+6.0	2.6+3.5+8.0
/	/	/	/	/	2.6+3.5+6.0	3.5+3.5+6.0	2.6+2.6+6.0	2.0+2.0+8.0	3.5+3.5+8.0

Four Unit (kW)				
2.0+2.0+2.0+2.0	2.0+2.0+2.6+2.6	2.0+2.6+2.6+3.5	2.0+2.0+2.0+5.3	2.6+2.6+3.5+5.3
2.0+2.0+2.0+2.6	2.0+2.0+2.6+3.5	2.6+2.6+2.6+2.6	2.0+2.0+2.6+5.3	2.0+2.0+2.0+7.1
2.0+2.0+2.0+3.5	2.0+2.0+2.6+5.3	2.6+2.6+2.6+3.5	2.0+2.6+2.6+5.3	2.0+2.0+2.6+7.1
2.0+2.0+2.0+5.3	2.0+2.0+3.5+3.5	2.0+2.6+2.6+2.6	2.6+2.6+2.6+5.3	2.6+2.6+3.5+6.0
2.0+2.0+2.0+6.0	2.0+2.0+2.6+6.0	2.0+2.0+2.0+6.0	2.0+2.0+2.6+6.0	2.0+2.0+2.0+8.0
2.0+2.6+2.6+6.0	2.6+2.6+2.6+6.0	2.0+2.0+2.6+8.0	/	/

INDOOR UNITS COMBINATION MULMI0513B

One Unit (kW)	Two Unit (kW)			Three Unit (kW)				
7.1	2.0+2.0	2.6+2.6	3.5+5.3	2.0+2.0+2.0	2.0+2.6+2.6	2.0+3.5+5.3	2.6+2.6+5.3	2.6+5.3+5.3
8.0	2.0+2.6	2.6+3.5	3.5+7.1	2.0+2.0+2.6	2.0+2.6+3.5	2.0+3.5+7.1	2.6+2.6+7.1	3.5+3.5+3.5
/	2.0+3.5	2.6+5.3	5.3+5.3	2.0+2.0+3.5	2.0+2.6+5.3	2.0+5.3+5.3	2.6+3.5+3.5	3.5+3.5+5.3
/	2.0+5.3	2.6+7.1	5.3+7.1	2.0+2.0+5.3	2.0+2.6+7.1	2.6+2.6+2.6	2.6+3.5+5.3	3.5+3.5+7.1
/	2.0+7.1	3.5+3.5	3.5+6.0	2.0+2.0+7.1	2.0+3.5+3.5	2.6+2.6+3.5	2.6+3.5+7.1	3.5+5.3+5.3
/	2.0+6.0	2.6+6.0	3.5+8.0	2.0+2.0+6.0	2.0+2.6+6.0	2.0+3.5+6.0	2.6+2.6+6.0	3.5+3.5+6.0
/	2.0+8.0	2.6+8.0	6.0+6.0	2.0+2.0+8.0	2.0+2.6+8.0	2.0+3.5+8.0	2.6+2.6+8.0	3.5+3.5+8.0
/	/	/	6.0+8.0	2.6+6.0+6.0	2.6+3.5+8.0	2.0+6.0+6.0	2.6+3.5+6.0	3.5+6.0+6.0

Four Unit (kW)						
2.0+2.0+2.0+2.0	2.0+2.0+2.6+2.6	2.0+2.0+3.5+5.3	2.0+2.6+2.6+5.3	2.0+2.6+5.3+5.3	2.6+2.6+2.6+3.5	2.6+2.6+3.5+7.1
2.0+2.0+2.0+2.6	2.0+2.0+2.6+3.5	2.0+2.0+3.5+7.1	2.0+2.6+2.6+7.1	2.0+3.5+3.5+3.5	2.6+2.6+2.6+5.3	2.6+3.5+3.5+3.5
2.0+2.0+2.0+3.5	2.0+2.0+2.6+5.3	2.0+2.0+5.3+5.3	2.0+2.6+3.5+3.5	2.0+3.5+3.5+5.3	2.6+2.6+2.6+7.1	2.6+3.5+3.5+5.3
2.0+2.0+2.0+5.3	2.0+2.0+2.6+7.1	2.0+2.6+2.6+2.6	2.0+2.6+3.5+5.3	2.0+3.5+3.5+7.1	2.6+2.6+3.5+3.5	3.5+3.5+3.5+3.5
2.0+2.0+2.0+7.1	2.0+2.0+3.5+3.5	2.0+2.6+2.6+3.5	2.0+2.6+3.5+7.1	2.6+2.6+2.6+2.6	2.6+2.6+3.5+5.3	3.5+3.5+3.5+5.3
2.0+3.5+5.3+5.3	2.6+2.6+5.3+5.3	2.6+3.5+3.5+7.1	3.5+3.5+3.5+7.1	2.6+3.5+3.5+8.0	2.0+2.6+3.5+8.0	3.5+3.5+3.5+8.0
2.0+2.0+2.0+6.0	2.0+2.0+2.6+6.0	2.0+2.0+3.5+6.0	2.0+2.6+2.6+6.0	2.0+2.6+6.0+6.0	2.6+2.6+2.6+6.0	2.6+2.6+3.5+8.0
2.0+2.0+2.0+8.0	2.0+2.0+2.6+8.0	2.0+2.0+3.5+8.0	2.0+2.6+2.6+8.0	2.0+3.5+3.5+6.0	2.6+2.6+2.6+8.0	2.6+3.5+3.5+6.0
2.0+3.5+6.0+6.0	2.6+2.6+6.0+6.0	2.0+2.0+6.0+6.0	2.0+2.6+3.5+6.0	2.0+3.5+3.5+8.0	2.6+2.6+3.5+6.0	3.5+3.5+3.5+6.0

Five Unit (kW)				
2.0+2.0+2.0+2.0+2.0	2.0+2.0+2.0+2.6+2.6	2.0+2.0+2.6+2.6+2.6	2.0+2.6+2.6+2.6+2.6	2.0+2.6+3.5+3.5+3.5
2.0+2.0+2.0+2.0+2.6	2.0+2.0+2.0+2.6+3.5	2.0+2.0+2.6+2.6+3.5	2.0+2.6+2.6+2.6+3.5	2.0+2.6+3.5+3.5+5.3
2.0+2.0+2.0+2.0+3.5	2.0+2.0+2.0+2.6+5.3	2.0+2.0+2.6+2.6+5.3	2.0+2.6+2.6+2.6+5.3	2.0+2.0+3.5+3.5+3.5
2.0+2.0+2.0+2.0+5.3	2.0+2.0+2.0+2.6+7.1	2.0+2.0+2.6+2.6+7.1	2.0+2.6+2.6+2.6+7.1	2.0+2.0+3.5+3.5+5.3
2.0+2.0+2.0+2.0+7.1	2.0+2.0+2.0+3.5+3.5	2.0+2.0+2.6+3.5+3.5	2.0+2.6+2.6+3.5+3.5	2.0+2.0+3.5+3.5+7.1
2.0+2.0+2.0+3.5+7.1	2.0+2.0+2.0+3.5+5.3	2.0+2.0+2.6+3.5+5.3	2.0+2.6+2.6+3.5+5.3	2.6+2.6+2.6+3.5+5.3
2.0+2.0+2.0+2.0+6.0	2.0+2.0+2.0+2.6+6.0	2.0+2.0+2.6+2.6+6.0	2.0+2.6+2.6+2.6+6.0	2.0+2.6+3.5+3.5+6.0
2.0+2.0+2.0+2.0+8.0	2.0+2.0+2.0+2.6+8.0	2.0+2.0+2.6+2.6+8.0	2.0+2.6+2.6+2.6+8.0	2.0+2.0+3.5+3.5+6.0
2.0+2.0+2.0+3.5+8.0	2.0+2.0+2.0+3.5+6.0	2.0+2.0+2.6+3.5+6.0	2.0+2.6+2.6+3.5+6.0	2.0+2.0+3.5+3.5+8.0

Five Unit (kW)			
2.0+2.0+2.0+5.3+5.3	2.0+3.5+3.5+3.5+3.5	2.6+2.6+2.6+2.6+2.6	2.6+2.6+3.5+3.5+3.5
2.0+2.0+2.0+5.3+7.1	2.0+3.5+3.5+3.5+5.3	2.6+2.6+2.6+2.6+3.5	2.6+2.6+3.5+3.5+5.3
2.0+2.0+2.6+3.5+7.1	2.6+2.6+2.6+2.6+5.3	2.6+2.6+2.6+3.5+7.1	2.6+2.6+3.5+3.5+7.1
2.0+2.6+2.6+3.5+7.1	2.6+2.6+2.6+2.6+7.1	2.6+3.5+3.5+3.5+3.5	3.5+3.5+3.5+3.5+3.5
2.0+2.6+3.5+3.5+7.1	2.6+2.6+2.6+3.5+3.5	2.6+3.5+3.5+3.5+5.3	3.5+3.5+3.5+3.5+5.3
2.0+2.0+2.0+6.0+6.0	2.0+3.5+3.5+3.5+6.0	2.6+2.6+2.6+3.5+8.0	2.6+2.6+3.5+3.5+6.0
2.0+2.0+2.0+6.0+8.0	2.6+2.6+2.6+2.6+6.0	2.6+3.5+3.5+3.5+6.0	2.6+2.6+3.5+3.5+8.0
2.0+2.0+2.6+3.5+8.0	2.6+2.6+2.6+2.6+8.0	2.0+2.6+3.5+3.5+8.0	3.5+3.5+3.5+3.5+6.0
2.0+2.6+2.6+3.5+8.0	2.6+2.6+2.6+3.5+6.0	/	/

INDOOR UNITS COMBINATION MULMIO618B

One Unit (kW)	Two Unit (kW)		Three Unit (kW)					
10.5	2.0+7.1	2.6+10.5	2.0+2.0+3.5	2.0+3.5+5.3	5.3+5.3+10.5	2.6+5.3+5.3	3.5+3.5+10.5	2.6+3.5+8.0
/	2.0+8.0	3.5+3.5	2.0+2.0+5.3	2.0+3.5+7.1	2.6+2.6+2.6	2.6+5.3+7.1	3.5+5.3+5.3	2.6+3.5+10.5
/	2.0+10.5	3.5+5.3	2.0+2.0+7.1	2.0+3.5+8.0	2.6+2.6+3.5	2.6+5.3+8.0	3.5+5.3+7.1	2.6+3.5+7.1
/	2.6+5.3	3.5+7.1	2.0+2.0+8.0	2.0+3.5+10.5	2.6+2.6+5.3	2.6+5.3+10.5	3.5+5.3+8.0	2.0+3.5+3.5
/	2.6+7.1	3.5+8.0	2.0+2.0+10.5	2.0+5.3+5.3	2.6+2.6+7.1	3.5+3.5+3.5	3.5+5.3+10.5	2.0+2.6+8.0
/	2.6+8.0	3.5+10.5	2.0+2.6+2.6	2.0+5.3+7.1	2.6+2.6+8.0	3.5+3.5+5.3	5.3+5.3+5.3	2.6+3.5+5.3
/	5.3+5.3	5.3+8.0	2.0+2.6+3.5	2.0+5.3+8.0	2.6+2.6+10.5	3.5+3.5+7.1	5.3+5.3+7.1	2.0+2.6+10.5
/	5.3+7.1	5.3+10.5	2.0+2.6+5.3	2.0+5.3+10.5	2.6+3.5+3.5	3.5+3.5+8.0	5.3+5.3+8.0	2.0+2.6+7.1
/	2.6+6.0	3.5+6.0	2.0+2.0+6.0	2.0+3.5+6.0	6.0+6.0+10.5	2.6+6.0+6.0	3.5+6.0+6.0	2.6+3.5+6.0
/	6.0+6.0	6.0+8.0	2.0+2.6+6.0	2.0+6.0+6.0	2.6+2.6+6.0	2.6+6.0+7.1	3.5+6.0+7.1	6.0+6.0+7.1
/	6.0+7.1	6.0+10.5	2.0+6.0+10.5	2.0+6.0+7.1	6.0+6.0+6.0	2.6+6.0+8.0	3.5+6.0+8.0	6.0+6.0+8.0
/	/	/	3.5+3.5+6.0	2.0+6.0+8.0	2.6+6.0+10.5	3.5+6.0+10.5	/	/

Four Unit (kW)							
2.0+2.0+2.0+2.6	2.0+2.0+3.5+3.5	2.0+2.6+2.6+2.6	2.0+2.6+5.3+5.3	2.0+3.5+5.3+7.1	2.6+2.6+2.6+8.0	2.6+3.5+3.5+3.5	3.5+3.5+3.5+5.3
2.0+2.0+2.0+3.5	2.0+2.0+3.5+5.3	2.0+2.6+2.6+3.5	2.0+2.6+5.3+7.1	2.0+3.5+5.3+8.0	2.6+2.6+2.6+10.5	2.6+3.5+3.5+5.3	3.5+3.5+3.5+7.1
2.0+2.0+2.0+5.3	2.0+2.0+3.5+7.1	2.0+2.6+2.6+5.3	2.0+2.6+5.3+8.0	2.0+3.5+5.3+10.5	2.6+2.6+3.5+3.5	2.6+3.5+3.5+7.1	3.5+3.5+3.5+8.0
2.0+2.0+2.0+7.1	2.0+2.0+3.5+8.0	2.0+2.6+2.6+7.1	2.0+2.6+5.3+10.5	2.0+5.3+5.3+5.3	2.6+2.6+3.5+5.3	2.6+3.5+3.5+8.0	3.5+3.5+3.5+10.5
2.0+2.0+2.0+8.0	2.0+2.0+3.5+10.5	2.0+2.6+2.6+8.0	2.0+3.5+3.5+3.5	2.0+5.3+5.3+7.1	2.6+2.6+3.5+7.1	2.6+3.5+3.5+10.5	3.5+3.5+5.3+5.3
2.0+2.0+2.0+10.5	2.0+2.0+5.3+5.3	2.0+2.6+2.6+10.5	2.0+3.5+3.5+5.3	2.0+5.3+5.3+8.0	2.6+2.6+3.5+8.0	2.6+3.5+5.3+5.3	3.5+3.5+5.3+7.1
2.0+2.0+2.6+2.6	2.0+2.0+5.3+7.1	2.0+2.6+3.5+3.5	2.0+3.5+3.5+7.1	2.6+2.6+2.6+2.6	2.6+2.6+3.5+10.5	2.6+3.5+5.3+7.1	3.5+3.5+5.3+8.0
2.0+2.0+2.6+3.5	2.0+2.0+5.3+8.0	2.0+2.6+3.5+5.3	2.0+3.5+3.5+8.0	2.6+2.6+2.6+3.5	2.6+2.6+5.3+5.3	2.6+3.5+5.3+8.0	3.5+5.3+5.3+5.3
2.0+2.0+2.6+5.3	2.0+2.0+5.3+10.5	2.0+2.6+3.5+7.1	2.0+3.5+3.5+10.5	2.6+2.6+2.6+5.3	2.6+2.6+5.3+7.1	2.6+5.3+5.3+5.3	3.5+5.3+5.3+7.1
2.0+2.0+2.6+7.1	2.0+2.0+2.6+10.5	2.0+2.6+3.5+8.0	2.0+3.5+5.3+5.3	2.6+2.6+2.6+7.1	2.6+2.6+5.3+8.0	3.5+3.5+3.5+3.5	2.6+2.6+5.3+10.5
2.0+2.0+2.0+6.0	2.0+2.0+3.5+6.0	2.0+2.6+2.6+6.0	2.0+2.6+6.0+6.0	2.0+3.5+6.0+7.1	2.6+2.6+3.5+6.0	2.0+2.0+2.6+8.0	2.0+2.6+3.5+10.5
2.0+2.0+2.6+6.0	2.0+2.0+6.0+6.0	2.0+2.6+3.5+6.0	2.0+2.6+6.0+7.1	2.0+3.5+6.0+8.0	2.6+2.6+6.0+6.0	2.6+3.5+3.5+6.0	3.5+3.5+3.5+6.0
3.5+6.0+6.0+7.1	2.0+2.0+6.0+7.1	2.0+3.5+3.5+6.0	2.0+2.6+6.0+8.0	2.0+3.5+6.0+10.5	2.6+2.6+6.0+7.1	2.6+3.5+6.0+6.0	3.5+3.5+6.0+6.0
2.6+2.6+6.0+10.5	2.0+2.0+6.0+8.0	2.0+3.5+6.0+6.0	2.0+2.6+6.0+10.5	2.0+6.0+6.0+6.0	2.6+2.6+6.0+8.0	2.6+3.5+6.0+7.1	3.5+3.5+6.0+7.1
2.6+2.6+2.6+6.0	2.0+2.0+6.0+10.5	2.0+6.0+6.0+8.0	2.6+6.0+6.0+6.0	2.0+6.0+6.0+7.1	3.5+6.0+6.0+6.0	2.6+3.5+6.0+8.0	3.5+3.5+6.0+8.0

Five Unit (kW)							
2.0+2.0+2.0+2.0+2.0	2.0+2.0+2.0+2.6+10.5	2.0+2.0+2.6+2.6+5.3	2.0+2.0+3.5+3.5+3.5	2.0+2.6+2.6+2.6+7.1	2.0+2.6+3.5+3.5+7.1	2.6+2.6+2.6+2.6+3.5	2.6+2.6+3.5+3.5+5.3
2.0+2.0+2.0+2.0+2.6	2.0+2.0+2.0+3.5+3.5	2.0+2.0+2.6+2.6+7.1	2.0+2.0+3.5+3.5+5.3	2.0+2.6+2.6+2.6+8.0	2.0+2.6+3.5+3.5+8.0	2.6+2.6+2.6+2.6+5.3	2.6+2.6+3.5+3.5+7.1
2.0+2.0+2.0+2.0+3.5	2.0+2.0+2.0+3.5+5.3	2.0+2.0+2.6+2.6+8.0	2.0+2.0+3.5+3.5+7.1	2.0+2.6+2.6+2.6+10.5	2.0+2.6+3.5+5.3+5.3	2.6+2.6+2.6+2.6+7.1	2.6+2.6+3.5+3.5+8.0
2.0+2.0+2.0+2.0+5.3	2.0+2.0+2.0+3.5+7.1	2.0+2.0+2.6+2.6+10.5	2.0+2.0+3.5+3.5+8.0	2.0+2.6+2.6+3.5+3.5	2.0+2.6+3.5+5.3+7.1	2.6+2.6+2.6+2.6+8.0	2.6+2.6+3.5+5.3+5.3
2.0+2.0+2.0+2.0+7.1	2.0+2.0+2.0+3.5+8.0	2.0+2.0+2.6+3.5+3.5	2.0+2.0+3.5+3.5+10.5	2.0+2.6+2.6+3.5+5.3	2.0+2.6+5.3+5.3+5.3	2.6+2.6+2.6+2.6+10.5	2.6+2.6+3.5+5.3+7.1
2.0+2.0+2.0+2.0+8.0	2.0+2.0+2.0+3.5+10.5	2.0+2.0+2.6+3.5+5.3	2.0+2.0+3.5+5.3+5.3	2.0+2.6+2.6+3.5+7.1	2.0+3.5+3.5+3.5+3.5	2.6+2.6+2.6+3.5+5.3	2.6+2.6+5.3+5.3+5.3
2.0+2.0+2.0+2.0+10.5	2.0+2.0+2.0+5.3+5.3	2.0+2.0+2.6+3.5+7.1	2.0+2.0+3.5+5.3+7.1	2.0+2.6+2.6+3.5+8.0	2.0+3.5+3.5+3.5+5.3	2.6+2.6+2.6+3.5+7.1	2.6+3.5+3.5+3.5+3.5
2.0+2.0+2.0+2.6+2.6	2.0+2.0+2.0+5.3+7.1	2.0+2.0+2.6+3.5+8.0	2.0+2.0+5.3+5.3+5.3	2.0+2.6+2.6+3.5+10.5	2.0+3.5+3.5+3.5+7.1	2.6+2.6+2.6+3.5+10.5	2.6+3.5+3.5+3.5+5.3
2.0+2.0+2.0+2.6+3.5	2.0+2.0+2.0+5.3+8.0	2.0+2.0+2.6+3.5+10.5	2.0+2.0+5.3+5.3+7.1	2.0+2.6+2.6+5.3+5.3	2.0+3.5+3.5+3.5+8.0	2.6+2.6+2.6+3.5+8.0	2.6+3.5+3.5+3.5+7.1
2.0+2.0+2.0+2.6+5.3	3.5+3.5+3.5+5.3+5.3	2.0+2.0+2.6+5.3+5.3	2.0+2.6+2.6+2.6+2.6	2.0+2.6+2.6+5.3+7.1	2.0+3.5+3.5+5.3+5.3	2.6+2.6+2.6+5.3+5.3	2.6+3.5+3.5+5.3+5.3
2.0+2.0+2.0+2.6+7.1	2.0+2.0+2.6+2.6+2.6	2.0+2.0+2.6+5.3+7.1	2.0+2.6+2.6+2.6+3.5	2.0+2.6+3.5+3.5+5.3	2.0+3.5+5.3+5.3+5.3	2.6+2.6+2.6+5.3+7.1	3.5+3.5+3.5+3.5+3.5
2.0+2.0+2.0+2.6+8.0	2.0+2.0+2.6+2.6+3.5	2.0+2.0+2.6+5.3+8.0	2.0+2.6+2.6+2.6+5.3	2.0+2.6+3.5+3.5+7.1	2.6+2.6+2.6+2.6+3.5	2.6+2.6+3.5+3.5+5.3	3.5+3.5+3.5+3.5+5.3
2.0+2.0+2.0+2.0+6.0	2.0+2.0+2.0+3.5+6.0	2.0+2.0+2.6+2.6+6.0	2.0+2.0+3.5+3.5+6.0	2.0+2.6+2.6+3.5+6.0	2.0+2.6+3.5+6.0+6.0	2.6+2.6+2.6+2.6+6.0	2.6+2.6+3.5+3.5+7.1
2.0+2.0+2.0+2.6+6.0	2.0+2.0+2.0+6.0+6.0	2.0+2.0+2.6+3.5+6.0	2.0+2.0+3.5+6.0+6.0	2.0+2.6+2.6+6.0+6.0	2.0+2.6+3.5+6.0+7.1	2.6+2.6+2.6+3.5+6.0	2.6+2.6+3.5+3.5+6.0
2.0+2.6+2.6+2.6+6.0	2.0+2.0+2.0+6.0+7.1	2.0+2.0+2.6+6.0+6.0	2.0+2.0+3.5+6.0+7.1	2.0+2.6+2.6+6.0+7.1	2.0+2.6+6.0+6.0+6.0	2.6+2.6+2.6+6.0+6.0	2.6+2.6+3.5+6.0+6.0
2.6+3.5+3.5+6.0+6.0	2.0+2.0+2.0+6.0+8.0	2.0+2.0+2.6+6.0+7.1	2.0+2.0+6.0+6.0+6.0	2.0+2.6+3.5+3.5+6.0	2.0+3.5+3.5+3.5+6.0	2.6+2.6+2.6+6.0+7.1	2.6+2.6+3.5+6.0+7.1
3.5+3.5+3.5+5.3+6.0	3.5+3.5+3.5+6.0+6.0	2.0+2.0+2.6+6.0+8.0	2.0+2.0+6.0+6.0+7.1	2.0+3.5+6.0+6.0+6.0	2.0+3.5+3.5+6.0+6.0	2.6+3.5+3.5+3.5+6.0	2.6+2.6+6.0+6.0+6.0

Six Unit (kW)							
2.0+2.0+2.0+2.0+2.0+2.0	2.0+2.0+2.0+2.0+3.5+3.5	2.0+2.0+2.0+2.6+2.6+10.5	2.0+2.0+2.6+2.6+2.6+2.6	2.0+2.0+2.6+3.5+3.5+7.1	2.0+2.6+2.6+2.6+3.5+7.1	2.6+2.6+2.6+2.6+2.6+7.1	
2.0+2.0+2.0+2.0+2.0+2.6	2.0+2.0+2.0+2.0+3.5+5.3	2.0+2.0+2.0+2.6+3.5+3.5	2.0+2.0+2.6+2.6+2.6+3.5	2.0+2.0+2.6+3.5+5.3+5.3	2.0+2.6+2.6+2.6+5.3+5.3	2.6+2.6+2.6+2.6+3.5+3.5	
2.0+2.0+2.0+2.0+2.0+3.5	2.0+2.0+2.0+2.0+3.5+7.1	2.0+2.0+2.0+2.6+3.5+5.3	2.0+2.0+2.6+2.6+2.6+5.3	2.0+2.0+3.5+3.5+3.5+3.5	2.0+2.6+2.6+3.5+3.5+3.5	2.6+2.6+2.6+2.6+3.5+5.3	
2.0+2.0+2.0+2.0+2.0+5.3	2.0+2.0+2.0+2.0+3.5+8.0	2.0+2.0+2.0+2.6+3.5+7.1	2.0+2.0+2.6+2.6+2.6+7.1	2.0+2.0+3.5+3.5+3.5+5.3	2.0+2.6+2.6+3.5+3.5+5.3	2.6+2.6+2.6+2.6+3.5+7.1	
2.0+2.0+2.0+2.0+2.0+7.1	2.0+2.0+2.0+2.0+3.5+10.5	2.0+2.0+2.0+2.6+3.5+8.0	2.0+2.0+2.6+2.6+2.6+8.0	2.0+2.0+3.5+3.5+3.5+7.1	2.0+2.6+2.6+3.5+3.5+7.1	2.6+2.6+2.6+2.6+5.3+5.3	
2.0+2.0+2.0+2.0+2.0+8.0	2.0+2.0+2.0+2.0+5.3+5.3	2.0+2.0+2.0+2.6+5.3+5.3	2.0+2.0+2.6+2.6+3.5+3.5	2.0+2.0+3.5+3.5+5.3+5.3	2.0+2.6+2.6+5.3+5.3+5.3	2.6+2.6+2.6+3.5+3.5+3.5	
2.0+2.0+2.0+2.0+2.0+10.5	2.0+2.0+2.0+2.0+5.3+7.1	2.0+2.0+2.0+2.6+5.3+7.1	2.0+2.0+2.6+2.6+3.5+5.3	2.0+2.6+2.6+2.6+2.6+2.6	2.0+2.6+3.5+3.5+3.5+3.5	2.6+2.6+2.6+3.5+3.5+5.3	
2.0+2.0+2.0+2.0+2.6+2.6	2.0+2.0+2.0+2.0+5.3+8.0	2.0+2.0+2.0+3.5+3.5+3.5	2.0+2.0+2.6+2.6+3.5+7.1	2.0+2.6+2.6+2.6+2.6+3.5	2.0+2.6+3.5+3.5+3.5+5.3	2.6+2.6+3.5+3.5+3.5+3.5	
2.0+2.0+2.0+2.0+2.6+3.5	2.0+2.0+2.0+2.6+2.6+2.6	2.0+2.0+2.0+3.5+3.5+5.3	2.0+2.0+2.6+2.6+3.5+8.0	2.0+2.6+2.6+2.6+2.6+5.3	2.0+3.5+3.5+3.5+3.5+3.5	2.6+2.6+3.5+3.5+3.5+5.3	
2.0+2.0+2.0+2.0+2.6+5.3	2.0+2.0+2.0+2.6+2.6+3.5	2.0+2.0+2.0+3.5+3.5+7.1	2.0+2.0+2.6+2.6+5.3+5.3	2.0+2.6+2.6+2.6+2.6+7.1	2.0+3.5+3.5+3.5+3.5+5.3	2.6+3.5+3.5+3.5+3.5+3.5	
2.0+2.0+2.0+2.0+2.6+7.1	2.0+2.0+2.0+2.6+2.6+5.3	2.0+2.0+2.0+3.5+3.5+8.0	2.0+2.0+2.6+2.6+5.3+7.1	2.0+2.6+2.6+2.6+2.6+8.0	2.6+2.6+2.6+2.6+2.6+2.6	3.5+3.5+3.5+3.5+3.5+3.5	
2.0+2.0+2.0+2.0+2.6+8.0	2.0+2.0+2.0+2.6+2.6+7.1	2.0+2.0+2.0+3.5+5.3+5.3	2.0+2.0+2.6+3.5+3.5+3.5	2.0+2.6+2.6+2.6+3.5+3.5	2.6+2.6+2.6+2.6+2.6+3.5	2.6+2.6+2.6+2.6+3.5+6.0	
2.0+2.0+2.0+2.0+2.6+10.5	2.0+2.0+2.0+2.6+2.6+8.0	2.0+2.0+2.0+3.5+5.3+7.1	2.0+2.0+2.6+3.5+3.5+5.3	2.0+2.6+2.6+2.6+3.5+5.3	2.6+2.6+2.6+2.6+2.6+5.3	2.6+2.6+2.6+2.6+6.0+6.0	
2.0+2.0+2.0+2.0+2.0+6.0	2.0+2.0+2.0+2.0+3.5+6.0	2.0+2.0+2.0+2.6+3.5+6.0	2.0+2.0+2.6+2.6+2.6+6.0	2.0+2.0+2.6+2.6+3.5+6.0	2.0+2.0+2.6+3.5+6.0+6.0	2.6+2.6+2.6+3.5+3.5+6.0	
2.0+2.0+2.0+2.0+2.6+6.0	2.0+2.0+2.0+2.6+2.6+6.0	2.0+2.0+2.0+3.5+6.0+6.0	2.0+2.0+2.6+2.6+3.5+6.0	2.0+2.6+2.6+2.6+3.5+6.0	2.0+2.6+3.5+3.5+3.5+6.0	2.6+2.6+3.5+3.5+3.5+6.0	
2.0+2.0+2.0+3.5+6.0+7.1	2.0+2.0+2.0+2.0+6.0+7.1	2.0+2.0+2.0+2.6+6.0+7.1	2.0+2.0+2.6+2.6+6.0+6.0	2.0+2.0+3.5+3.5+6.0+6.0	2.0+2.6+2.6+3.5+6.0+6.0	2.0+3.5+3.5+3.5+3.5+6.0	
2.6+2.6+2.6+2.6+2.6+6.0	2.0+2.0+2.0+2.0+6.0+8.0	2.0+2.0+2.0+3.5+3.5+6.0	2.0+2.0+2.6+2.6+6.0+7.1	2.0+2.6+2.6+2.6+2.6+6.0	2.0+2.6+3.5+3.5+3.5+6.0	2.0+2.6+2.6+2.6+3.5+6.0	
2.0+2.0+2.0+2.6+2.6+6.0	2.0+2.0+2.0+3.5+6.0+6.0	2.0+2.0+2.6+3.5+3.5+6.0	/	/	/	/	

World's No.1 Residential Inverter Air Conditioner Company

World's No.1 Air Treatment Brand For 4 Consecutive Years



¹ Data source: Euromonitor International (Shanghai) Limited; Consumer Appliances 24ed, retail volume sales in unit, 2020 to 2023 data.

² Data source: Euromonitor International (Shanghai) Ltd., measured in terms of total production volume of residential inverter air conditioners (including OEM brands) in 2022, based on research conducted in Jul 2023. Inverter air conditioners refer to air conditioners installed with variable-speed drives.

Midea Air Conditioner Australia

MD APPLIANCES PTY LTD

Address: 7 Ordish Rd, Dandenong South VIC 3175

Phone: 1300 726 002

Website: MDHOME.COM.AU